

**809901** **CYLINDRICAL POLE 3,5 M.**  
**TO BE BURIED**


Cylindrical pole made in steel S235JR (UNI EN 10219) hot galvanized (UNI EN 1461), **diameter 76 mm, thickness 4 mm.** Phospho-chromatised and polyester powder coated.  
**Total height 3.500 mm, including 500 mm to be buried into the ground.** Includes IP54 cover plate 132x38 mm and terminal block in double insulation.

**809902** **CYLINDRICAL POLE 4,5 M.**  
**TO BE BURIED**


Cylindrical pole made in steel S235JR (UNI EN 10219) hot galvanized (UNI EN 1461), **diameter 76 mm, thickness 4 mm.** Phospho-chromatised and polyester powder coated.  
**Total height 4.500 mm, including 500 mm to be buried into the ground.** Includes IP54 cover plate 132x38 mm and terminal block in double insulation.

**809903** **CYLINDRICAL POLE 5,5 M.**  
**TO BE BURIED**


Cylindrical pole made in steel S235JR (UNI EN 10219) hot galvanized (UNI EN 1461), **diameter 76 mm, thickness 4 mm.** Phospho-chromatised and polyester powder coated.  
**Total height 5.500 mm, including 500 mm to be buried into the ground.** Includes IP54 cover plate 132x38 mm and terminal block in double insulation.

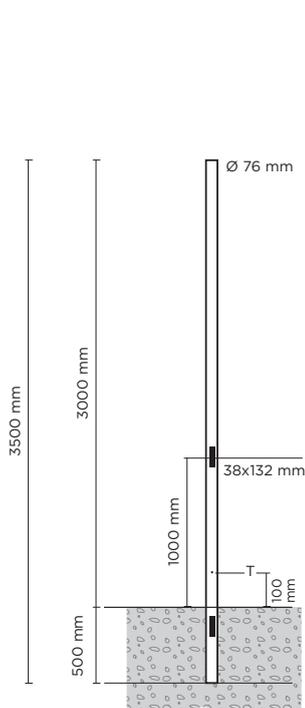

T= Grounding, threaded galvanized insert pole Thickness= 4mm

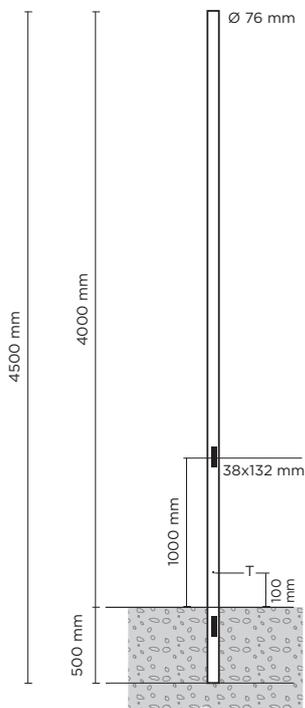

T= Grounding, threaded galvanized insert pole Thickness= 4mm

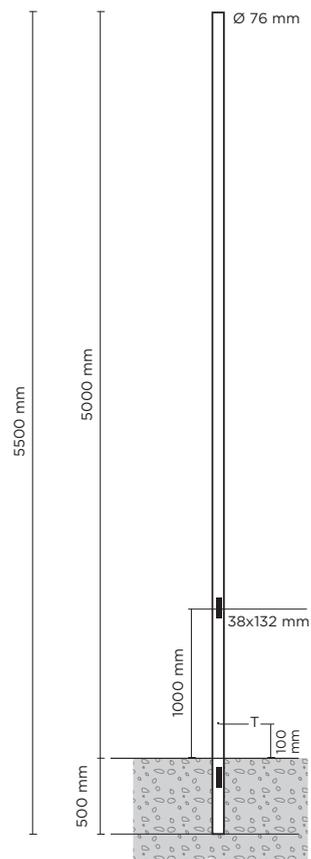

T= Grounding, threaded galvanized insert pole Thickness= 4mm